


## HIGH DEFINITION TV ANALYSER

**PROMAX** launches its new **TV EXPLORER **HD****.

*This new jewel of the **PROMAX** range will become a reference in the industry for being the very first meter of its kind to actually meet the requirements to be called a real HDTV instrument.*

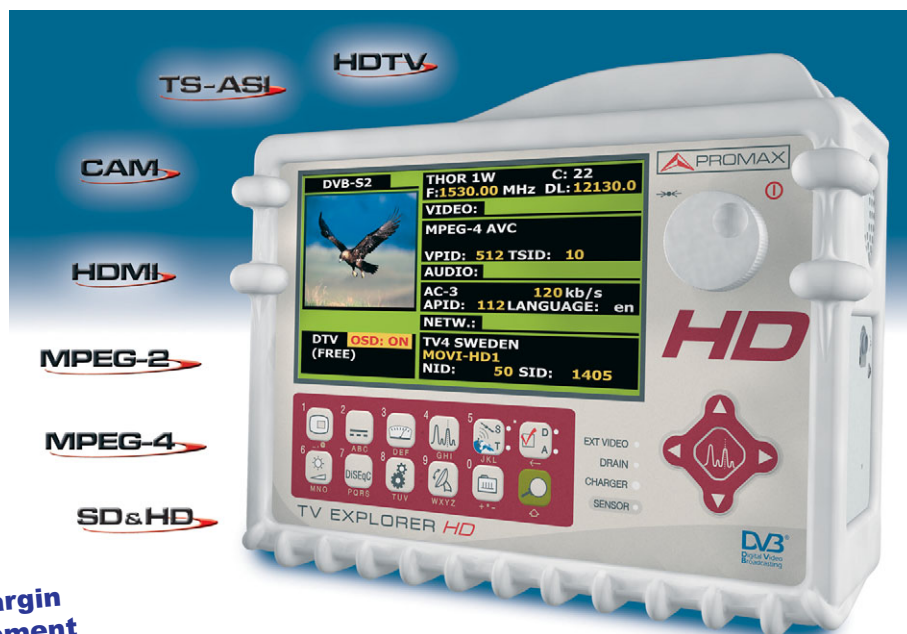

**HD**  
meter

✓ **Link margin measurement**

✓ **MPEG-2 and H.264 video decoder**

✓ **MPEG-1/2 and AAC audio decoder**

The typical high definition formats used in nowadays broadcast are 1080i (1920x1080 pixels) and 720p (1280x720 pixels). Most of the TV programmes using these video resolutions are being broadcasted compressed in MPEG-4. The **TV EXPLORER **HD**** is able to display those TV programmes thanks to its state of the art electronics.

HDTV content is expensive to produce and therefore it is usually protected by encryption. Once again the **TV EXPLORER **HD**** is setting new standards with its CAM interface that allows the encrypted high definition programmes to be displayed as well.

Millions of people in Europe are now served with digital TV broadcasting only. Analogue switch off is history for them. For these and those who still are in the migration process from analogue to digital, the use of digital TV distribution equipment will be more frequent every day.

This type of equipment, such as our **Digital To TV** system, manipulates digital signals and very often use TS-ASI (Transport Stream) as the standard interface. So having TS-ASI input and output becomes a fundamental feature in a TV Analyser if it really wants to be future proof.

Would it be possible to have all those features in a 2 kg meter?

- ✓ **Video decoding: MPEG-2 and MPEG-4 H.264**
- ✓ **Audio decoding: MPEG-1, MPEG-2 and AAC**
- ✓ **Video formats: SD (standard definition) and HD (high definition)**
- ✓ **Video resolutions: 1080i, 720p and 576i**
- ✓ **Screen formats: 16:9 and 4:3**
- ✓ **HDMI interface**
- ✓ **DVB-T/H, DVB-C and DVB-S/S2**
- ✓ **CAM module (Conditional Access) for encrypted channels**
- ✓ **TS-ASI input and output**

# HIGH DEFINITION TV ANALYSER

| SPÉCIFICATIONS                                                                                                                                                                                                                                  | TV EXPLORER <i>HD</i>                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>GENERAL</b><br>Frequency margin<br>Tuning modes<br>Channel plan<br>Resolution<br>5-1000 MHz<br>950-2150 MHz<br>Automatic search ( <i>Explorer</i> )<br>Analogue and digital signal identification<br>Transport Stream parameters identifying | Continuous tuning from 5 to 1000 MHz and from 950 to 2150 MHz<br>Channel or frequency (IF or downlink at satellite band)<br>Configurable on demand<br><br>50 kHz<br>< 200 kHz (span FULL-500-200-100-50-32-16 MHz)<br>Threshold level selectable. DVB-T/H, DVB-C and DVB-S2 selection<br>Automatic<br>Detection of Audio and video bitrate, Network ID and Service list                                                                                                             |
| <b>VIDEO</b><br>Digital modulations<br>Resolutions<br>Video formats<br>Colour system<br>TV standard<br>Aspect ratio                                                                                                                             | DVB-T, DVB-H, DVB-S, DVB-S2, DVB-C<br>1080i, 720p, 576i<br>MPEG-2, MPEG-4 H.264<br>PAL, NTSC, SECAM<br>M, N, B, G, I, D, K and L<br>16:9, 4:3                                                                                                                                                                                                                                                                                                                                       |
| <b>RF INPUT</b><br>Impedance<br>Connector<br>Maximum signal<br>Maximum input voltage<br>DC to 100 Hz<br><br>5 MHz to 2150 MHz                                                                                                                   | 75 $\Omega$<br>Universal, with BNC or F adapter<br>130 dB $\mu$ V<br><br>50 V rms (powered by the AL-103 power charger)<br>30 V rms (not powered by the AL-103 power charger)<br>130 dB $\mu$ V                                                                                                                                                                                                                                                                                     |
| <b>DIGITAL MEASUREMENTS</b><br>DVB-T/H (COFDM)<br>DVB-C (QAM)<br>DVB-S (QPSK)<br>DVB-S2 (QPSK/8PSK)                                                                                                                                             | Numeric and level bar<br>Power, CBER, VBER, MER, C/N and Noise margin<br>Power, BER, MER, C/N and Noise margin<br>Power, CBER, VBER, MER, C/N and Noise margin<br>Link Margin, Power, CBER, LBER, MER, C/N and Noise margin                                                                                                                                                                                                                                                         |
| <b>ANALOGUE MEASUREMENTS</b><br>Terrestrial bands<br>Satellite bands                                                                                                                                                                            | Level, V/A ratio, C/N ratio and FM deviation and demodulation<br>Level and C/N ratio                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>ADVANCED FUNCTIONS</b>                                                                                                                                                                                                                       | Constellation diagram for DVB-T/H, DVB-C, DVB-S and DVB-S2<br>Echoes analyser mode<br>Built-in spectrum analyser with direct access keys<br>Datalogger (measurements automatic acquisition and storage) for digital and analogue channels<br>SAT IF test (IF distribution network response for satellite band)<br>Attenuation test function (signal distribution network response for terrestrial band)<br>DiSEqC generator and LNB supply<br>Audio and Video recording and playing |
| <b>CONNECTIONS</b>                                                                                                                                                                                                                              | SCART, HDMI, TS-ASI (input and output), USB, Common Interface                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>MECHANICAL FEATURES</b><br>Dimensions<br>Weight                                                                                                                                                                                              | 230 (W.) x 161 (H.) x 76 (D.) mm. Total size: 2,814 cm <sup>3</sup><br>2.2 kg (without holster)                                                                                                                                                                                                                                                                                                                                                                                     |